A5. Report Forms

M11 EGR

LUBRICANT PERFORMANCE TEST

VERSION *20010328*

METHOD *METHOD*

CONDUCTED FOR:

TSTSPON1

TSTSPON2

LABVALID	V = VALID; THE REFERENCE OIL/NON-REFERENCE OIL WAS EVALUATED IN ACCORDANCE WITH THE TEST PROCEDURE.
	I = INVALID; THE REFERENCE OIL/NON-REFERENCE OIL WAS NOT EVALUATED
	N = NOT INTERPRETABLE; THE NON-REFERENCE OIL RESULTS CANNOT BE INTERPRETED AND SHALL NOT BE USED FOR MULTIPLE TEST ACCEPTANCE.

TSTOIL	NR = Non-Reference Oil Test
	RO = Reference Oil Test

STAND: *STAND*	ENGINE NO.:*ENGINE*	ENGINE RUN NO.: *ENRUN*
END OF TEST DATE: *DTCOMP*	END OF TEST TIME:*EOTTIME*	
OIL CODE:*OILCODE*		
FORMULATION/STAND CODE: *FORM*		
ALTCODE1: *ALTCODE1*	ALTCODE2: *ALTCODE2*	ALTCODE3: *ALTCODE3*

In my opinion *OPVALID* been conducted in a valid manner in accordance with the Test and the appropriate amendments through the information letter system. The remarks included in this report describe

SUBMITTED BY: *SUBLAB*

Testing Laboratory

SUBSIGIM

Signature

SUBNAME

Typed Name

SUBTITLE

Typed Name

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 2
TABLE OF CONTENTS

1.	Final Report Cover Sheet	Form 1
2.	Table of Contents	Form 2
3.	Summary of Test Method	Form 3
4.	Test Results Summary	Form 4
5.	Operational Summary	Form 5
6.	Crosshead Mass Loss Summary	Form 6
7.	Oil Filter Delta Pressure Plot	Form 7
8.	Sludge Rating Summary	Form 8
9.	Rod Bearing Mass Loss	Form 9
10.	Piston Rating Summary	Form 10
11.	Piston 1 Deposit Rating	Form 11
12.	Piston 2 Deposit Rating	Form 12
13.	Piston 3 Deposit Rating	Form 13
14.	Piston 4 Deposit Rating	Form 14
15.	Piston 5 Deposit Rating	Form 15
16.	Piston 6 Deposit Rating	Form 16
17.	Ring Mass Loss Summary	Form 17
18.	Oil Analysis Summary	Form 18
19.	Test Fuel Analysis	Form 19
20.	Injector Adjusting Screw Mass Loss	Form 20
21.	Unscheduled Downtime & Maintenance Summary	Form 21
22.	Characteristics of the Data Acquisition System	Form 22
23.	Liner Wear Summary	Form 23

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 3
SUMMARY OF TEST METHOD

The M11 EGR Lubricant Performance Test is a fired engine-dynamometer test which evaluates the ability of a lubricant to minimize crosshead wear, filter plugging, and sludge build-up. this test is a two stage, steady state test (constant speed and load). Stage A is 50 h and is run with retarded fuel injection timing to produce elevated soot levels in the oil. Stage B is 50 h and is run under heavy load conditions to induce wear. The stages are run in sequence (Stage A followed by Stage B) three times for a total test length of 300 h.

The test engine is a Cummins M11 diesel engine with EGR. It is an in-line six cylinder, four stroke, turbocharged engine with

M11 EGR TEST CONDITIONS

Parameter	**Stage A**	**Stage B**
Time, h	50	50
Injection Timing, ˚BTDC	16 min	32
Speed, r/min	1800	1600
Fuel Flow, kg/h	58.0	64.4
EGR Rate, %	Record	8.5 - 9.8
Inlet Manifold Temp., ˚C	80	65.5
Coolant Out Temp., ˚C	65.5	65.5
Fuel In Temp., ˚C	40	40
Oil Gallery Temp., ˚C	115	115
Intake Air Temp., ˚C	Record	Record
Intake Air Pressure, kPa	Record	Record
Intake Manifold Pressure, kPa	300 Minimum	320 Minimum
Exhaust Back Pressure, kPa	107	107
Crankcase Pressure, kPa	Record	Record
Coolant System Pressure, kPa	99 - 107	99 - 107
Power, kW	Record	Record
Torque, Nm	Record	Record
Pre-turbine Exhaust Temp., ˚C	Record	Record
Tailpipe Exhaust Temp., ˚C	Record	Record
Oil Sump Temp., ˚C	Record	Record
Inlet Air Dew Point, ˚C	Record	Record
Inlet Air Humidity, kg/kg	Record	Record
Oil Gallery Pressure, kPa	Record	Record
Oil Filter Delta P, kPa	Record	Record

M11 EGR LUBRICANT PERFORMANCE TEST
Test Results Summary
Form 4

Laborator *LAB*	EOT Date: *DTCOMP*	EOT Time: *EOTTIME*
Stand: *STAND*	Engine *ENGINE*	Engine Run *ENRUN*
Formulation/Stand *FORM*		
Oil *OILCODE*	Engine Kit *ENKIT*	

DATE TEST STARTED	*DTSTRT*
START TIME	*STRTIME*
TEST LENGTH	*TESTLEN*
TMC OIL CODE [A]	*IND*
LABORATORY OIL CODE	*LABOCODE*
SAE VISCOSITY	*SAEVISC*
TGA SOOT % AT 50 h (2.8 minimum)	*TGA050*
TGA SOOT % AT 250 h (8.0 - 9.5)	*TGA250*
TOTAL OIL CONSUMPTION, kg	*TOTOCON*

	Adjusted Average Crosshead Mass Loss	Filter Plugging Delta P (kPa)	Average Sludge Rating (merits)
Original Result	*ACWL*	*OILDP*	*ASRT*
Transformed Result [B]	*TRNACWL*	*TRNODP*	*TRNASRT*
Correction Factor [B]	*ACWLCF*	*OILDPCF*	*ASRTCF*
Corrected Transformed Result [B]	*ACWLCOR*	*OILDPCOR*	*ASRTCOR*
Severity Adjustment [B]	*ACWL_SA*	*OILDP_SA*	*ASRT_SA*
Final Transformed Result [B]	*TACWLFNL*	*TODPFNL*	*TASRTFNL*
Final Result	*ACWLFNL*	*OILDPFNL*	*ASRTFNL*

LAST STAND REFERENCE RESULTS	
TEST NUMBER: *STAND* *RENGINE* *RENRUN*	
OILCODE	*ROILCODE*
TEST LENGTH	*RTESTLEN*
TMC OIL CODE	*RIND*
EOT DATE	*RDTCOMP*
EOT TIME	*REOTTIME*
STAND CALIBRATION EXPIRATION DATE	*DTCALEXP*
TGA SOOT % AT 50 h (2.8 minimum)	*RTGA050*
TGA SOOT % AT 250 h (8.5 - 9.5)	*RTGA250*
TOTAL OIL CONSUMPTION, kg	*RTOTOCON*

	Adjusted Average Crosshead Mass Loss	Filter Plugging Delta P (kPa)	Average Sludge Rating (merits)
Original Result	*RACWL*	*ROILDP*	*RASRT*
Transformed Result [B]	*RTRNACWL*	*RTRNODP*	*RTRNASRT*
Correction Factor [B]	*RACWLCF*	*ROILDPCF*	*RASRTCF*
Corrected Transformed Result [B]	*RACWLCOR*	*RTODPCOR*	*RASRTCOR*
Final Transformed Result [B]	*RTCWLFNL*	*RTODPFNL*	*RTSRTFNL*
Final Result	*RACWLFNL*	*RFPDPFNL*	*RASRTFNL*

[A] Reference Tests Only

[B] Transformed Units

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 5
OPERATIONAL SUMMARY

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
Test Number Stand: *STAND*	Engine: *ENGINE*	Engine Run *ENRUN*
Formulation/Stand *FORM*		
Oil Code: *OILCODE*		

Controlled Parameters

Parameter	Units	QI Threshold	EOT QI [A]	Target		Average		Samples [B]	BQD [C]	Over/Under Range [D]
Speed	r/min	0.000	*QRPM*	1800	1600	*ARPMA*	*ARPMB*	*NRPM*	*BRPM*	*ORPM*
Fuel Flow	kg/h	0.000	*QFFLO*	58.0	64.4	*AFFLOA*	*AFFLOB*	*NFFLO*	*BFFLO*	*OFFLO*
Coolant Out	˚C	0.000	*QCOLOUT*	65.5		*ACOLOUT*		*NCOLOUT*	*BCOLOUT*	*OCOLOUT*
Fuel In	˚C	0.000	*QFUELT*	40		*AFUELT*		*NFUELT*	*BFUELT*	*OFUELT*
Oil Gallery	˚C	0.000	*QOILTEM*	115		*AOILTEM*		*NOILTEM*	*BOILTEM*	*OOILTEM*
Intake Manifold	˚C	0.000	*QINMANT*	80.0	65.5	*AINMANTA*	*AINMANTB*	*NINMANT*	*BINMANT*	*OINMANT*
Exhaust	kPa	0.000	*QEXHSTP*	107		*AEXHSTP*		*NEXHSTP*	*BEXHSTP*	*OEXHSTP*

Non-controlled Parameters

Parameter	Units	Typical Values [E]		Average	
Torque	N-m	TBD	TBD	*ALOADA*	*ALOADB*
Power	kW	TBD	TBD	*APWRA*	*APWRB*
EGR Rate [F]	%	Record	8.5 - 9.8	*EGRA*	*EGRB*
Blowby	L/min	TBD		*ABLOBY*	
Coolant In	˚C	TBD		*ACOLIN*	
Intake Air	˚C	TBD		*AINAIRT*	
Pre-Turbine (F)	˚C	TBD		*APTURFT*	
Pre-Turbine (R)	˚C	TBD		*APTURRT*	
Tailpipe	˚C	TBD		*ATAILPT*	
Fuel	kPa	TBD		*AFPMPP*	
Oil Gallery	kPa	TBD		*AOILPRS*	
Coolant	kPa	99 - 107		*ACOLOUP*	
Intake Manifold	kPa	TBD		*AINMANP*	
Crankcase	kPa	TBD		*ACCASEP*	
Intake Air	kPa	TBD		*AINAIRR*	

A QI values above the threshold are acceptable by the M11 Surveillance Panel. QI values below the threshold may not be considered acceptable based on

B Total number of data points taken

C Number of Bad Quality Data points not used in the calculation of the statistical measures

D Number of points clipped by over/under range limits

E Typical values determined from reference oil test database

F Stage B EGR Rate shall be within specified range for test to be operationally valid.

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 6
CROSSHEAD MASS LOSS SUMMARY

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
Test Number		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

LOCATION	SERIAL NO.	PRETEST MASS (g)	EOT MASS (g)	MASS LOSS (mg)
1E	*CHDSN1E*	*CHDPTW1E*	*CHDEW1E*	*CHDEWL1E*
1I	*CHDSN1I*	*CHDPTW1I*	*CHDEW1I*	*CHDEWL1I*
2I	*CHDSN2I*	*CHDPTW2I*	*CHDEW2I*	*CHDEWL2I*
2E	*CHDSN2E*	*CHDPTW2E*	*CHDEW2E*	*CHDEWL2E*
3E	*CHDSN3E*	*CHDPTW3E*	*CHDEW3E*	*CHDEWL3E*
3I	*CHDSN3I*	*CHDPTW3I*	*CHDEW3I*	*CHDEWL3I*
4I	*CHDSN4I*	*CHDPTW4I*	*CHDEW4I*	*CHDEWL4I*
4E	*CHDSN4E*	*CHDPTW4E*	*CHDEW4E*	*CHDEWL4E*
5E	*CHDSN5E*	*CHDPTW5E*	*CHDEW5E*	*CHDEWL5E*
5I	*CHDSN5I*	*CHDPTW5I*	*CHDEW5I*	*CHDEWL5I*
6I	*CHDSN6I*	*CHDPTW6I*	*CHDEW6I*	*CHDEWL6I*
6E	*CHDSN6E*	*CHDPTW6E*	*CHDEW6E*	*CHDEWL6E*

INTAKE/EXHAUST SUMMARY	INTAKE		EXHAUST	
	As Measured	Outlier	As Measured	Outlier
Average Crosshead Mass Loss	*ACHDWLI*	*OACHDWLI*	*ACHDWLE*	*OACHDWLE*
Minimum Crosshead Mass Loss	*ICHDWLI*	*OICHDWLI*	*ICHDWLE*	*OICHDWLE*
Maximum Crosshead Mass Loss	*XCHDWLI*	*OXCHDWLI*	*XCHDWLE*	*OXCHDWLE*
Standard Deviation (mg)	*SCHDWLI*	*OSCHDWLI*	*SCHDWLE*	*OSCHDWLE*
Outlier Crossheads Locations [A]	*CHDOUTI*		*CHDOUTE*	

[A] Location Designation. Example: 3E

Overall Summary	As Measured	Outlier Screened	Adjusted to X.X%
Average Crosshead Mass Loss	*AMACAWL*	*CAWL*	*ACWL*
Minimum Crosshead Mass Loss	*AMICAWL*	*ICHDEWL*	
Maximum Crosshead Mass Loss	*AMXCAWL*	*XCHDEWL*	
Standard Deviation (mg)	*AMSCAWL*	*SCHDEWL*	

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 7
OIL FILTER DELTA PRESSURE PLOT

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
Test Number		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

OIL FILTER DELTA PRESSURE vs TEST HOURS

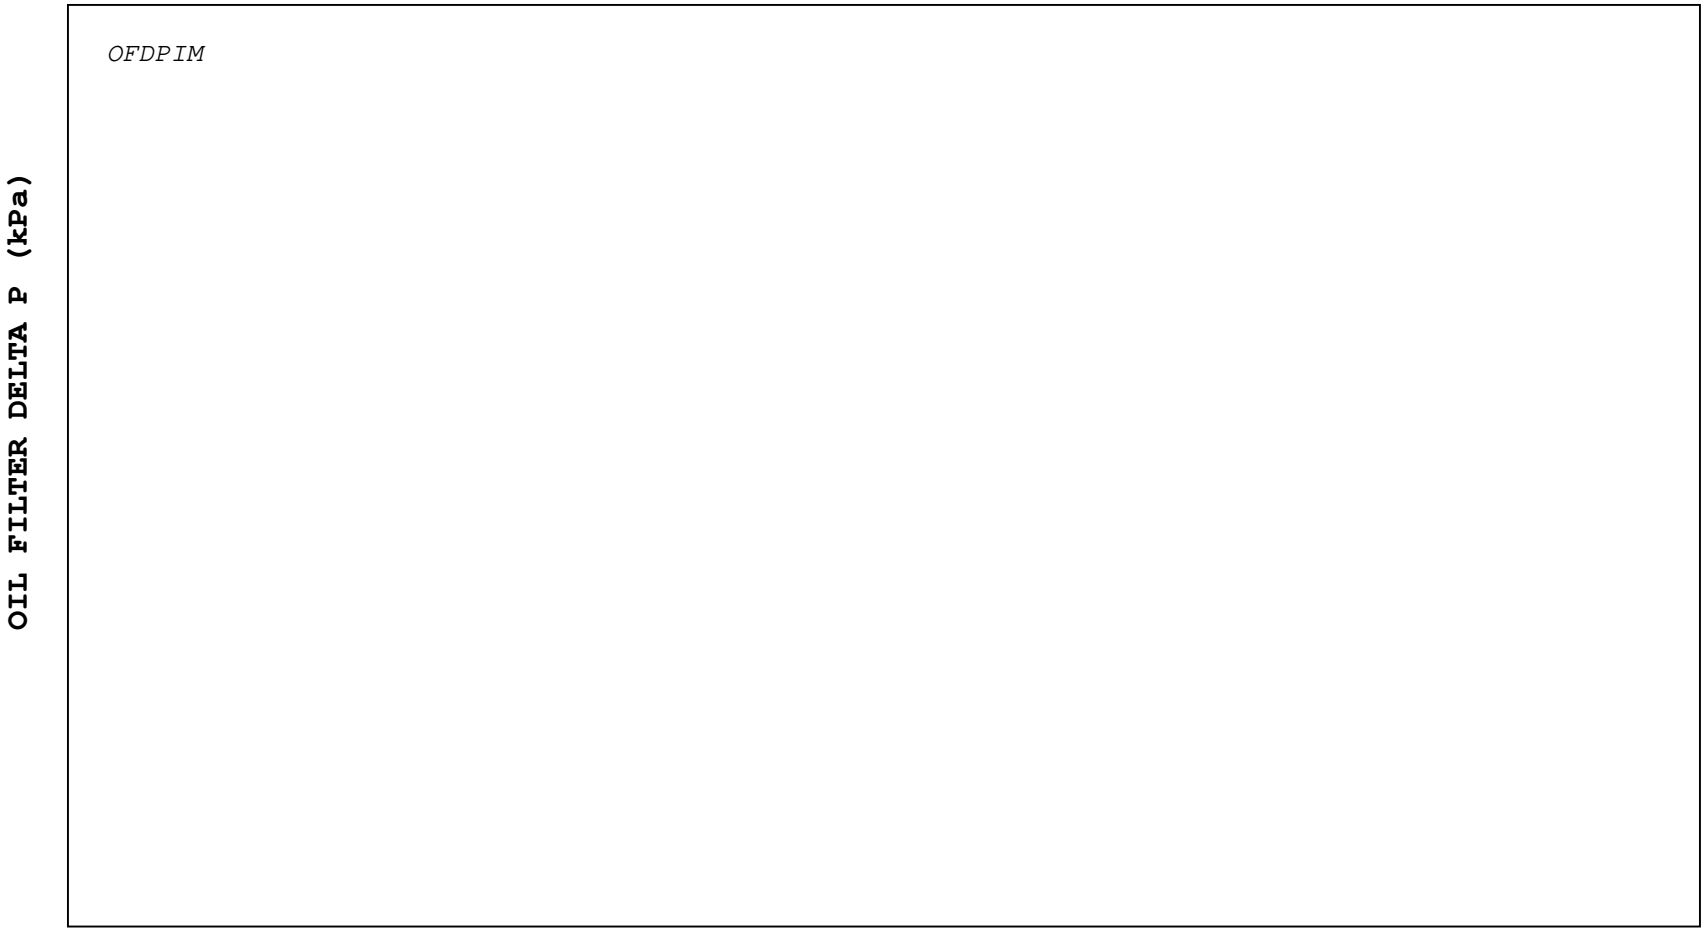

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 8
SLUDGE RATING SUMMARY

Laboratory *LAB*	EOT Date: *DTCOMP*	EOT Time: *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

SLUDGE RATING SUMMARY

Sludge Depth	Valve Cover % of Area	Valve Cover Volume Factor	Oil Pan % of Area	Oil Pan Volume Factor
1/4A	*RCSEA01*	*RCSEV01*	*OILPSA01*	*OILPSV01*
1/2A	*RCSEA02*	*RCSEV02*	*OILPSA02*	*OILPSV02*
3/4A	*RCSEA03*	*RCSEV03*	*OILPSA03*	*OILPSV03*
A	*RCSEA04*	*RCSEV04*	*OILPSA04*	*OILPSV04*
AB	*RCSEA05*	*RCSEV05*	*OILPSA05*	*OILPSV05*
B	*RCSEA06*	*RCSEV06*	*OILPSA06*	*OILPSV06*
BC	*RCSEA07*	*RCSEV07*	*OILPSA07*	*OILPSV07*
C	*RCSEA08*	*RCSEV08*	*OILPSA08*	*OILPSV08*
D	*RCSEA09*	*RCSEV09*	*OILPSA09*	*OILPSV09*
E	*RCSEA10*	*RCSEV10*	*OILPSA10*	*OILPSV10*
F	*RCSEA11*	*RCSEV11*	*OILPSA11*	*OILPSV11*
G	*RCSEA12*	*RCSEV12*	*OILPSA12*	*OILPSV12*
H	*RCSEA13*	*RCSEV13*	*OILPSA13*	*OILPSV13*
I	*RCSEA14*	*RCSEV14*	*OILPSA14*	*OILPSV14*
J	*RCSEA15*	*RCSEV15*	*OILPSA15*	*OILPSV15*
	Total Volume *RCSEVT*		Total Volume *OILPSVT*	
	MERIT RATING: *RCSEMRT*		MERIT RATING: *OILPSMRT*	
	Average Sludge Rating: *ASRT*			

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 9
ROD BEARING MASS LOSS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
Test Number		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

CYLINDER NUMBER	BEARING LOCATION	PRE-TEST MASS (g)	POST-TEST MASS (g)	MASS LOSS (mg)
1	UPPER	*BWCYL1TP*	*BWCYL1TE*	*BWL1T*
	LOWER	*BWCYL1BP*	*BWCYL1BE*	*BWL1B*
2	UPPER	*BWCYL2TP*	*BWCYL2TE*	*BWL2T*
	LOWER	*BWCYL2BP*	*BWCYL2BE*	*BWL2B*
3	UPPER	*BWCYL3TP*	*BWCYL3TE*	*BWL3T*
	LOWER	*BWCYL3BP*	*BWCYL3BE*	*BWL3B*
4	UPPER	*BWCYL4TP*	*BWCYL4TE*	*BWL4T*
	LOWER	*BWCYL4BP*	*BWCYL4BE*	*BWL4B*
5	UPPER	*BWCYL5TP*	*BWCYL5TE*	*BWL5T*
	LOWER	*BWCYL5BP*	*BWCYL5BE*	*BWL5B*
6	UPPER	*BWCYL6TP*	*BWCYL6TE*	*BWL6T*
	LOWER	*BWCYL6BP*	*BWCYL6BE*	*BWL6B*

	BEARING MASS LOSS
AVERAGE (mg)	*ASBWL*
MINIMUM (mg)	*ISBWL*
MAXIMUM (mg)	*XSBWL*
STANDARD DEVIATION (mg)	*SSBWL*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 10
PISTON RATING SUMMARY

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

UNWEIGHTED DEMERITS										
PISTON NUMBER	Lands				Grooves			Under Crown	Oil Cooling Gallery	Total Demerits
	1	2	3	4	1	2	3			
1	*L1UWD1*	*L2UWD1*	*L3UWD1*	*L4UWD1*	*G1UWD1*	*G2UWD1*	*G3UWD1*	*UCUWD1*	*OGUWD1*	*UWD1*
2	*L1UWD2*	*L2UWD2*	*L3UWD2*	*L4UWD2*	*G1UWD2*	*G2UWD2*	*G3UWD2*	*UCUWD2*	*OGUWD2*	*UWD2*
3	*L1UWD3*	*L2UWD3*	*L3UWD3*	*L4UWD3*	*G1UWD3*	*G2UWD3*	*G3UWD3*	*UCUWD3*	*OGUWD3*	*UWD3*
4	*L1UWD4*	*L2UWD4*	*L3UWD4*	*L4UWD4*	*G1UWD4*	*G2UWD4*	*G3UWD4*	*UCUWD4*	*OGUWD4*	*UWD4*
5	*L1UWD5*	*L2UWD5*	*L3UWD5*	*L4UWD5*	*G1UWD5*	*G2UWD5*	*G3UWD5*	*UCUWD5*	*OGUWD5*	*UWD5*
6	*L1UWD6*	*L2UWD6*	*L3UWD6*	*L4UWD6*	*G1UWD6*	*G2UWD6*	*G3UWD6*	*UCUWD6*	*OGUWD6*	*UWD6*
Average Demerits	*AL1UWD*	*AL2UWD*	*AL3UWD*	*AL4UWD*	*AG1UWD*	*AG2UWD*	*AG3UWD*	*AUCUWD*	*AOGUWD*	
					Average Total Unweighted Demerits					*TOTUWD*

PARAMETER	PISTON NUMBER						AVERAGE
	1	2	3	4	5	6	
TGC	*TGC1*	*TGC2*	*TGC3*	*TGC4*	*TGC5*	*TGC6*	*ATGC*
TLC	*TLC1*	*TLC2*	*TLC3*	*TLC4*	*TLC5*	*TLC6*	*ATLC*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 11
PISTON 1 DEPOSIT RATINGS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	GROOVES				LANDS					GROOVES		LANDS				OIL COOLING GALLERY (2)		UNDER CROWN (1)	
DEP.	NO. 1		NO. 2		NO. 1		NO. 2		DEP FACTOR	NO. 3		NO. 3		NO. 4					
FACTOR	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC-1.0	*G1HCA1*	*G1HCD1*	*G2HCA1*	*G2HCD1*	*L1HCA1*	*L1HCD1*	*L2HCA1*	*L2HCD1*		*G3HCA1*	*G3HCD1*	*L3HCA1*	*L3HCD1*	*L4HCA1*	*L4HCD1*				
MC-0.5	*G1MCA1*	*G1MCD1*								*G3MCA1*	*G3MCD1*								
LC-.25	*G1LCA1*	*G1LCD1*	*G2LCA1*	*G2LCD1*	*L1LCA1*	*L1LCD1*	*L2LCA1*	*L2LCD1*		*G3LCA1*	*G3LCD1*	*L3LCA1*	*L3LCD1*	*L4LCA1*	*L4LCD1*	*OGLCA1*	*OGLCD1*	*U1LCA1*	*U1LCD1*
TOTAL	*G1ACTOT1*	*G1DCTOT1*	*G2ACTOT1*	*G2DCTOT1*	*L1ACTOT1*	*L1DCTOT1*	*L2ACTOT1*	*L2DCTOT1*		*G3ACTOT1*	*G3DCTOT1*	*L3ACTOT1*	*L3DCTOT1*	*L4ACTOT1*	*L4DCTOT1*	*OGACTOT1*	*OGDCTOT1*	*U1ACTOT1*	*U1DCTOT1*
VARNISH																			
8 – 9	*G1L9A1*	*G1L9D1*	*G2L9A1*	*G2L9D1*	*L1L9A1*	*L1L9D1*	*L2L9A1*	*L2L9D1*											
7 – 7.9	*G1L8A1*	*G1L8D1*	*G2L8A1*	*G2L8D1*	*L1L8A1*	*L1L8D1*	*L2L8A1*	*L2L8D1*	7.5	*G3L75A1*	*G3L75D1*	*L3L75A1*	*L3L75D1*	*L4L75A1*	*L4L75D1*	*OGV75A1*	*OGV75D1*	*U1L75A1*	*U1L75D1*
6 – 6.9	*G1L7A1*	*G1L7D1*	*G2L7A1*	*G2L7D1*	*L1L7A1*	*L1L7D1*	*L2L7A1*	*L2L7D1*											
5 – 5.9	*G1L6A1*	*G1L6D1*	*G2L6A1*	*G2L6D1*	*L1L6A1*	*L1L6D1*	*L2L6A1*	*L2L6D1*											
4 – 4.9	*G1L5A1*	*G1L5D1*	*G2L5A1*	*G2L5D1*	*L1L5A1*	*L1L5D1*	*L2L5A1*	*L2L5D1*	4.5	*G3L45A1*	*G3L45D1*	*L3L45A1*	*L3L45D1*	*L4L45A1*	*L4L45D1*	*OGV45A1*	*OGV45D1*	*U1L45A1*	*U1L45D1*
3 – 3.9	*G1L4A1*	*G1L4D1*	*G2L4A1*	*G2L4D1*	*L1L4A1*	*L1L4D1*	*L2L4A1*	*L2L4D1*											
2 – 2.9	*G1L3A1*	*G1L3D1*	*G2L3A1*	*G2L3D1*	*L1L3A1*	*L1L3D1*	*L2L3A1*	*L2L3D1*											
1 – 1.9	*G1L2A1*	*G1L2D1*	*G2L2A1*	*G2L2D1*	*L1L2A1*	*L1L2D1*	*L2L2A1*	*L2L2D1*	1.5	*G3L15A1*	*G3L15D1*	*L3L15A1*	*L3L15D1*	*L4L15A1*	*L4L15D1*	*OGV15A1*	*OGV15D1*	*U1L15A1*	*U1L15D1*
> 0 – 0.9	*G1L1A1*	*G1L1D1*	*G2L1A1*	*G2L1D1*	*L1L1A1*	*L1L1D1*	*L2L1A1*	*L2L1D1*											
TOTAL	*G1ALTOT1*	*G1DLTOT1*	*G2ALTOT1*	*G2DLTOT1*	*L1ALTOT1*	*L1DLTOT1*	*L2ALTOT1*	*L2DLTOT1*		*G3ALTOT1*	*G3DLTOT1*	*L3ALTOT1*	*L3DLTOT1*	*L4ALTOT1*	*L4DLTOT1*	*OGAVTOT1*	*OGDVTOT1*	*U1ALTOT1*	*U1DLTOT1*
Rating	*G1UWD1*		*G2UWD1*		*L1UWD1*		*L2UWD1*			*G3UWD1*		*L3UWD1*		*L4UWD1*		*OGUWD1*		*UCUWD1*	

TGC %	UNWEIGHTED DEP.	T.L. CARBON	T.L. FLAKED CARBON %
TGC1	*UWD1*	*TLC1*	*TLFC1*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 12
PISTON 2 DEPOSIT RATINGS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	GROOVES				LANDS				DEP FACTOR	GROOVES		LANDS				OIL COOLING GALLERY (2)		UNDER CROWN (1)	
DEP. FACTOR	NO. 1		NO. 2		NO. 1		NO. 2			NO. 3		NO. 3		NO. 4					
	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC-1.0	*G1HCA2*	*G1HCD2*	*G2HCA2*	*G2HCD2*	*L1HCA2*	*L1HCD2*	*L2HCA2*	*L2HCD2*		*G3HCA2*	*G3HCD2*	*L3HCA2*	*L3HCD2*	*L4HCA2*	*L4HCD2*				
MC-0.5	*G1MCA2*	*G1MCD2*								*G3MCA2*	*G3MCD2*								
LC-.25	*G1LCA2*	*G1LCD2*	*G2LCA2*	*G2LCD2*	*L1LCA2*	*L1LCD2*	*L2LCA2*	*L2LCD2*		*G3LCA2*	*G3LCD2*	*L3LCA2*	*L3LCD2*	*L4LCA2*	*L4LCD2*	*OGLCA2*	*OGLCD2*	*U1LCA2*	*U1LCD2*
TOTAL	*G1ACTOT2*	*G1DCTOT2*	*G2ACTOT2*	*G2DCTOT2*	*L1ACTOT2*	*L1DCTOT2*	*L2ACTOT2*	*L2DCTOT2*		*G3ACTOT2*	*G3DCTOT2*	*L3ACTOT2*	*L3DCTOT2*	*L4ACTOT2*	*L4DCTOT2*	*OGACTOT2*	*OGDCTOT2*	*U1ACTOT2*	*U1DCTOT2*
VARNISH																			
8 – 9	*G1L9A2*	*G1L9D2*	*G2L9A2*	*G2L9D2*	*L1L9A2*	*L1L9D2*	*L2L9A2*	*L2L9D2*											
7 – 7.9	*G1L8A2*	*G1L8D2*	*G2L8A2*	*G2L8D2*	*L1L8A2*	*L1L8D2*	*L2L8A2*	*L2L8D2*	7.5	*G3L75A2*	*G3L75D2*	*L3L75A2*	*L3L75D2*	*L4L75A2*	*L4L75D2*	*OGV75A2*	*OGV75D2*	*U1L75A2*	*U1L75D2*
6 – 6.9	*G1L7A2*	*G1L7D2*	*G2L7A2*	*G2L7D2*	*L1L7A2*	*L1L7D2*	*L2L7A2*	*L2L7D2*											
5 – 5.9	*G1L6A2*	*G1L6D2*	*G2L6A2*	*G2L6D2*	*L1L6A2*	*L1L6D2*	*L2L6A2*	*L2L6D2*											
4 – 4.9	*G1L5A2*	*G1L5D2*	*G2L5A2*	*G2L5D2*	*L1L5A2*	*L1L5D2*	*L2L5A2*	*L2L5D2*	4.5	*G3L45A2*	*G3L45D2*	*L3L45A2*	*L3L45D2*	*L4L45A2*	*L4L45D2*	*OGV45A2*	*OGV45D2*	*U1L45A2*	*U1L45D2*
3 – 3.9	*G1L4A2*	*G1L4D2*	*G2L4A2*	*G2L4D2*	*L1L4A2*	*L1L4D2*	*L2L4A2*	*L2L4D2*											
2 – 2.9	*G1L3A2*	*G1L3D2*	*G2L3A2*	*G2L3D2*	*L1L3A2*	*L1L3D2*	*L2L3A2*	*L2L3D2*											
1 – 1.9	*G1L2A2*	*G1L2D2*	*G2L2A2*	*G2L2D2*	*L1L2A2*	*L1L2D2*	*L2L2A2*	*L2L2D2*	1.5	*G3L15A2*	*G3L15D2*	*L3L15A2*	*L3L15D2*	*L4L15A2*	*L4L15D2*	*OGV15A2*	*OGV15D2*	*U1L15A2*	*U1L15D2*
>0 – 0.9	*G1L1A2*	*G1L1D2*	*G2L1A2*	*G2L1D2*	*L1L1A2*	*L1L1D2*	*L2L1A2*	*L2L1D2*											
TOTAL	*G1ALTOT2*	*G1DLTOT2*	*G2ALTOT2*	*G2DLTOT2*	*L1ALTOT2*	*L1DLTOT2*	*L2ALTOT2*	*L2DLTOT2*		*G3ALTOT2*	*G3DLTOT2*	*L3ALTOT2*	*L3DLTOT2*	*L4ALTOT2*	*L4DLTOT2*	*OGAVTOT2*	*OGDVTOT2*	*U1ALTOT2*	*U1DLTOT2*
Rating	*G1UWD2*		*G2UWD2*		*L1UWD2*		*L2UWD2*			*G3UWD2*		*L3UWD2*		*L4UWD2*		*OGUWD2*		*UCUWD2*	

TGC %	UNWEIGHTED DEP.	T.L. CARBON	T.L. FLAKED CARBON %
TGC2	*UWD2*	*TLC2*	*TLFC2*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 13
PISTON 3 DEPOSIT RATINGS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	GROOVES				LANDS				DEP FACTOR	GROOVES		LANDS				OIL COOLING GALLERY (2)		UNDER CROWN (1)	
DEP.	NO. 1		NO. 2		NO. 1		NO. 2			NO. 3		NO. 3		NO. 4					
FACTOR	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC-1.0	*G1HCA3*	*G1HCD3*	*G2HCA3*	*G2HCD3*	*L1HCA3*	*L1HCD3*	*L2HCA3*	*L2HCD3*		*G3HCA3*	*G3HCD3*	*L3HCA3*	*L3HCD3*	*L4HCA3*	*L4HCD3*				
MC-0.5	*G1MCA3*	*G1MCD3*								*G3MCA3*	*G3MCD3*								
LC-.25	*G1LCA3*	*G1LCD3*	*G2LCA3*	*G2LCD3*	*L1LCA3*	*L1LCD3*	*L2LCA3*	*L2LCD3*		*G3LCA3*	*G3LCD3*	*L3LCA3*	*L3LCD3*	*L4LCA3*	*L4LCD3*	*OGLCA3*	*OGLCD3*	*U1LCA3*	*U1LCD3*
TOTAL	*G1ACTOT3*	*G1DCTOT3*	*G2ACTOT3*	*G2DCTOT3*	*L1ACTOT3*	*L1DCTOT3*	*L2ACTOT3*	*L2DCTOT3*		*G3ACTOT3*	*G3DCTOT3*	*L3ACTOT3*	*L3DCTOT3*	*L4ACTOT3*	*L4DCTOT3*	*OGACTOT3*	*OGDCTOT3*	*U1ACTOT3*	*U1DCTOT3*
VARNISH																			
8 - 9	*G1L9A3*	*G1L9D3*	*G2L9A3*	*G2L9D3*	*L1L9A3*	*L1L9D3*	*L2L9A3*	*L2L9D3*											
7 - 7.9	*G1L8A3*	*G1L8D3*	*G2L8A3*	*G2L8D3*	*L1L8A3*	*L1L8D3*	*L2L8A3*	*L2L8D3*	7.5	*G3L75A3*	*G3L75D3*	*L3L75A3*	*L3L75D3*	*L4L75A3*	*L4L75D3*	*OGV75A3*	*OGV75D3*	*U1L75A3*	*U1L75D3*
6 - 6.9	*G1L7A3*	*G1L7D3*	*G2L7A3*	*G2L7D3*	*L1L7A3*	*L1L7D3*	*L2L7A3*	*L2L7D3*											
5 - 5.9	*G1L6A3*	*G1L6D3*	*G2L6A3*	*G2L6D3*	*L1L6A3*	*L1L6D3*	*L2L6A3*	*L2L6D3*											
4 - 4.9	*G1L5A3*	*G1L5D3*	*G2L5A3*	*G2L5D3*	*L1L5A3*	*L1L5D3*	*L2L5A3*	*L2L5D3*	4.5	*G3L45A3*	*G3L45D3*	*L3L45A3*	*L3L45D3*	*L4L45A3*	*L4L45D3*	*OGV45A3*	*OGV45D3*	*U1L45A3*	*U1L45D3*
3 - 3.9	*G1L4A3*	*G1L4D3*	*G2L4A3*	*G2L4D3*	*L1L4A3*	*L1L4D3*	*L2L4A3*	*L2L4D3*											
2 - 2.9	*G1L3A3*	*G1L3D3*	*G2L3A3*	*G2L3D3*	*L1L3A3*	*L1L3D3*	*L2L3A3*	*L2L3D3*											
1 - 1.9	*G1L2A3*	*G1L2D3*	*G2L2A3*	*G2L2D3*	*L1L2A3*	*L1L2D3*	*L2L2A3*	*L2L2D3*	1.5	*G3L15A3*	*G3L15D3*	*L3L15A3*	*L3L15D3*	*L4L15A3*	*L4L15D3*	*OGV15A3*	*OGV15D3*	*U1L15A3*	*U1L15D3*
>0 - 0.9	*G1L1A3*	*G1L1D3*	*G2L1A3*	*G2L1D3*	*L1L1A3*	*L1L1D3*	*L2L1A3*	*L2L1D3*											
TOTAL	*G1ALTOT3*	*G1DLTOT3*	*G2ALTOT3*	*G2DLTOT3*	*L1ALTOT3*	*L1DLTOT3*	*L2ALTOT3*	*L2DLTOT3*		*G3ALTOT3*	*G3DLTOT3*	*L3ALTOT3*	*L3DLTOT3*	*L4ALTOT3*	*L4DLTOT3*	*OGAVTOT3*	*OGDVTOT3*	*U1ALTOT3*	*U1DLTOT3*
Rating	*G1UWD3*		*G2UWD3*		*L1UWD3*		*L2UWD3*			*G3UWD3*		*L3UWD3*		*L4UWD3*		*OGUWD3*		*UCUWD3*	
TGC %									UNWEIGHTED DEP.			T.L. CARBON				T.L. FLAKED CARBON %			
TGC3									*UWD3*			*TLC3*				*TLFC3*			

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 14
PISTON 4 DEPOSIT RATINGS

Laborato *LAB*	EOT *DTCOMP*	EOT *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE *ENGINE*	ENGINE RUN *ENRUN*
FORMULATION/STAND *FORM*		
OILCODE *OILCODE*		

	GROOVES				LANDS				DEP FACTOR	GROOVES		LANDS				OIL COOLING		UNDER CROWN (1)	
DEP.	NO. 1		NO. 2		NO. 1		NO. 2			NO. 3		NO. 3		NO. 4					
FACTOR	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC-1.0	*G1HCA4*	*G1HCD4*	*G2HCA4*	*G2HCD4*	*L1HCA4*	*L1HCD4*	*L2HCA4*	*L2HCD4*		*G3HCA4*	*G3HCD4*	*L3HCA4*	*L3HCD4*	*L4HCA4*	*L4HCD4*				
MC-0.5	*G1MCA4*	*G1MCD4*								*G3MCA4*	*G3MCD4*								
LC-.25	*G1LCA4*	*G1LCD4*	*G2LCA4*	*G2LCD4*	*L1LCA4*	*L1LCD4*	*L2LCA4*	*L2LCD4*		*G3LCA4*	*G3LCD4*	*L3LCA4*	*L3LCD4*	*L4LCA4*	*L4LCD4*	*OGLCA4*	*OGLCD4*	*U1LCA4*	*U1LCD4*
TOTAL	*G1ACTOT4*	*G1DCTOT4*	*G2ACTOT4*	*G2DCTOT4*	*L1ACTOT4*	*L1DCTOT4*	*L2ACTOT4*	*L2DCTOT4*		*G3ACTOT4*	*G3DCTOT4*	*L3ACTOT4*	*L3DCTOT4*	*L4ACTOT4*	*L4DCTOT4*	*OGACTOT4*	*OGDCTOT4*	*U1ACTOT4*	*U1DCTOT4*
VARNISH																			
8 - 9	*G1L9A4*	*G1L9D4*	*G2L9A4*	*G2L9D4*	*L1L9A4*	*L1L9D4*	*L2L9A4*	*L2L9D4*											
7 - 7.9	*G1L8A4*	*G1L8D4*	*G2L8A4*	*G2L8D4*	*L1L8A4*	*L1L8D4*	*L2L8A4*	*L2L8D4*	7.5	*G3L75A4*	*G3L75D4*	*L3L75A4*	*L3L75D4*	*L4L75A4*	*L4L75D4*	*OGV75A4*	*OGV75D4*	*L1L75A4*	*U1L75D4*
6 - 6.9	*G1L7A4*	*G1L7D4*	*G2L7A4*	*G2L7D4*	*L1L7A4*	*L1L7D4*	*L2L7A4*	*L2L7D4*											
5 - 5.9	*G1L6A4*	*G1L6D4*	*G2L6A4*	*G2L6D4*	*L1L6A4*	*L1L6D4*	*L2L6A4*	*L2L6D4*											
4 - 4.9	*G1L5A4*	*G1L5D4*	*G2L5A4*	*G2L5D4*	*L1L5A4*	*L1L5D4*	*L2L5A4*	*L2L5D4*	4.5	*G3L45A4*	*G3L45D4*	*L3L45A4*	*L3L45D4*	*L4L45A4*	*L4L45D4*	*OGV45A4*	*OGV45D4*	*L1L45A4*	*U1L45D4*
3 - 3.9	*G1L4A4*	*G1L4D4*	*G2L4A4*	*G2L4D4*	*L1L4A4*	*L1L4D4*	*L2L4A4*	*L2L4D4*											
2 - 2.9	*G1L3A4*	*G1L3D4*	*G2L3A4*	*G2L3D4*	*L1L3A4*	*L1L3D4*	*L2L3A4*	*L2L3D4*											
1 - 1.9	*G1L2A4*	*G1L2D4*	*G2L2A4*	*G2L2D4*	*L1L2A4*	*L1L2D4*	*L2L2A4*	*L2L2D4*	1.5	*G3L15A4*	*G3L15D4*	*L3L15A4*	*L3L15D4*	*L4L15A4*	*L4L15D4*	*OGV15A4*	*OGV15D4*	*L1L15A4*	*U1L15D4*
>0 -	*G1L1A4*	*G1L1D4*	*G2L1A4*	*G2L1D4*	*L1L1A4*	*L1L1D4*	*L2L1A4*	*L2L1D4*											
TOTAL	*G1ALTOT4*	*G1DLTOT4*	*G2ALTOT4*	*G2DLTOT4*	*L1ALTOT4*	*L1DLTOT4*	*L2ALTOT4*	*L2DLTOT4*		*G3ALTOT4*	*G3DLTOT4*	*L3ALTOT4*	*L3DLTOT4*	*L4ALTOT4*	*L4DLTOT4*	*OGAVTOT4*	*OGDVTOT4*	*U1ALTOT4*	*U1DLTOT4*
Rating	*G1UWD4*		*G2UWD4*		*L1UWD4*		*L2UWD4*			*G3UWD4*		*L3UWD4*		*L4UWD4*		*OGUWD4*		*UCUWD4*	
TGC %									UNWEIGHTED DEP.			T.L. CARBON				T.L. FLAKED CARBON			
TGC4									*UWD4*			*TLC4*				*TLFC4*			

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 15
PISTON 5 DEPOSIT RATINGS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	GROOVES				LANDS				DEP FACTOR	GROOVES		LANDS				OIL COOLING GALLERY (2)		UNDER CROWN (1)	
DEP.	NO. 1		NO. 2		NO. 1		NO. 2			NO. 3		NO. 3		NO. 4					
FACTOR	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC–1.0	*G1HCA5*	*G1HCD5*	*G2HCA5*	*G2HCD5*	*L1HCA5*	*L1HCD5*	*L2HCA5*	*L2HCD5*		*G3HCA5*	*G3HCD5*	*L3HCA5*	*L3HCD5*	*L4HCA5*	*L4HCD5*				
MC–0.5	*G1MCA5*	*G1MCD5*								*G3MCA5*	*G3MCD5*								
LC–.25	*G1LCA5*	*G1LCD5*	*G2LCA5*	*G2LCD5*	*L1LCA5*	*L1LCD5*	*L2LCA5*	*L2LCD5*		*G3LCA5*	*G3LCD5*	*L3LCA5*	*L3LCD5*	*L4LCA5*	*L4LCD5*	*OGLCA5*	*OGLCD5*	*U1LCA5*	*U1LCD5*
TOTAL	*G1ACTOT5*	*G1DCTOT5*	*G2ACTOT5*	*G2DCTOT5*	*L1ACTOT5*	*L1DCTOT5*	*L2ACTOT5*	*L2DCTOT5*		*G3ACTOT5*	*G3DCTOT5*	*L3ACTOT5*	*L3DCTOT5*	*L4ACTOT5*	*L4DCTOT5*	*OGACTOT5*	*OGDCTOT5*	*U1ACTOT5*	*U1DCTOT5*
VARNISH																			
8 – 9	*G1L9A5*	*G1L9D5*	*G2L9A5*	*G2L9D5*	*L1L9A5*	*L1L9D5*	*L2L9A5*	*L2L9D5*											
7 – 7.9	*G1L8A5*	*G1L8D5*	*G2L8A5*	*G2L8D5*	*L1L8A5*	*L1L8D5*	*L2L8A5*	*L2L8D5*	7.5	*G3L75A5*	*G3L75D5*	*L3L75A5*	*L3L75D5*	*L4L75A5*	*L4L75D5*	*OGV75A5*	*OGV75D5*	*L75A5*	*U1L75D5*
6 – 6.9	*G1L7A5*	*G1L7D5*	*G2L7A5*	*G2L7D5*	*L1L7A5*	*L1L7D5*	*L2L7A5*	*L2L7D5*											
5 – 5.9	*G1L6A5*	*G1L6D5*	*G2L6A5*	*G2L6D5*	*L1L6A5*	*L1L6D5*	*L2L6A5*	*L2L6D5*											
4 – 4.9	*G1L5A5*	*G1L5D5*	*G2L5A5*	*G2L5D5*	*L1L5A5*	*L1L5D5*	*L2L5A5*	*L2L5D5*	4.5	*G3L45A5*	*G3L45D5*	*L3L45A5*	*L3L45D5*	*L4L45A5*	*L4L45D5*	*OGV45A5*	*OGV45D5*	*L45A5*	*U1L45D5*
3 – 3.9	*G1L4A5*	*G1L4D5*	*G2L4A5*	*G2L4D5*	*L1L4A5*	*L1L4D5*	*L2L4A5*	*L2L4D5*											
2 – 2.9	*G1L3A5*	*G1L3D5*	*G2L3A5*	*G2L3D5*	*L1L3A5*	*L1L3D5*	*L2L3A5*	*L2L3D5*											
1 – 1.9	*G1L2A5*	*G1L2D5*	*G2L2A5*	*G2L2D5*	*L1L2A5*	*L1L2D5*	*L2L2A5*	*L2L2D5*	1.5	*G3L15A5*	*G3L15D5*	*L3L15A5*	*L3L15D5*	*L4L15A5*	*L4L15D5*	*OGV15A5*	*OGV15D5*	*L15A5*	*U1L15D5*
>0 – 0.9	*G1L1A5*	*G1L1D5*	*G2L1A5*	*G2L1D5*	*L1L1A5*	*L1L1D5*	*L2L1A5*	*L2L1D5*											
TOTAL	*G1ALTOT5*	*G1DLTOT5*	*G2ALTOT5*	*G2DLTOT5*	*L1ALTOT5*	*L1DLTOT5*	*L2ALTOT5*	*L2DLTOT5*		*G3ALTOT5*	*G3DLTOT5*	*L3ALTOT5*	*L3DLTOT5*	*L4ALTOT5*	*L4DLTOT5*	*OGAVTOT5*	*OGDVTOT5*	*U1ALTOT5*	*U1DLTOT5*
Rating	*G1UWD5*		*G2UWD5*		*L1UWD5*		*L2UWD5*			*G3UWD5*		*L3UWD5*		*L4UWD5*		*OGUWD5*		*UCUWD5*	
TGC %									UNWEIGHTED DEP.			T.L. CARBON				T.L. FLAKED CARBON %			
TGC5									*UWD5*			*TLC5*				*TLFC5*			

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 16
PISTON 6 DEPOSIT RATINGS

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	GROOVES				LANDS					GROOVES		GROOVES				OIL COOLING GALLERY (2)		UNDER CROWN (1)	
DEP. FACTOR	NO. 1		NO. 2		NO. 1		NO. 2		DEP FACTOR	NO. 3		NO. 3		NO. 4					
	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.		A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.	A, %	DEM.
CARBON																			
HC–1.0	*G1HCA6*	*G1HCD6*	*G2HCA6*	*G2HCD6*	*L1HCA6*	*L1HCD6*	*L2HCA6*	*L2HCD6*		*G3HCA6*	*G3HCD6*	*L3HCA6*	*L3HCD6*	*L4HCA6*	*L4HCD6*				
MC–0.5	*G1MCA6*	*G1MCD6*								*G3MCA6*	*G3MCD6*								
LC–.25	*G1LCA6*	*G1LCD6*	*G2LCA6*	*G2LCD6*	*L1LCA6*	*L1LCD6*	*L2LCA6*	*L2LCD6*		*G3LCA6*	*G3LCD6*	*L3LCA6*	*L3LCD6*	*L4LCA6*	*L4LCD6*	*OGLCA6*	*OGLCD6*	*U1LCA6*	*U1LCD6*
TOTAL	*G1ACTOT6*	*G1DCTOT6*	*G2ACTOT6*	*G2DCTOT6*	*L1ACTOT6*	*L1DCTOT6*	*L2ACTOT6*	*L2DCTOT6*		*G3ACTOT6*	*G3DCTOT6*	*L3ACTOT6*	*L3DCTOT6*	*L4ACTOT6*	*L4DCTOT6*	*OGACTOT6*	*OGDCTOT6*	*U1ACTOT6*	*U1DCTOT6*
VARNISH																			
8 – 9	*G1L9A6*	*G1L9D6*	*G2L9A6*	*G2L9D6*	*L1L9A6*	*L1L9D6*	*L2L9A6*	*L2L9D6*											
7 – 7.9	*G1L8A6*	*G1L8D6*	*G2L8A6*	*G2L8D6*	*L1L8A6*	*L1L8D6*	*L2L8A6*	*L2L8D6*	7.5	*G3L75A6*	*G3L75D6*	*L3L75A6*	*L3L75D6*	*L4L75A6*	*L4L75D6*	*OGV75A6*	*OGV75D6*	*L75A6*	*U1L75D6*
6 – 6.9	*G1L7A6*	*G1L7D6*	*G2L7A6*	*G2L7D6*	*L1L7A6*	*L1L7D6*	*L2L7A6*	*L2L7D6*											
5 – 5.9	*G1L6A6*	*G1L6D6*	*G2L6A6*	*G2L6D6*	*L1L6A6*	*L1L6D6*	*L2L6A6*	*L2L6D6*											
4 – 4.9	*G1L5A6*	*G1L5D6*	*G2L5A6*	*G2L5D6*	*L1L5A6*	*L1L5D6*	*L2L5A6*	*L2L5D6*	4.5	*G3L45A6*	*G3L45D6*	*L3L45A6*	*L3L45D6*	*L4L45A6*	*L4L45D6*	*OGV45A6*	*OGV45D6*	*L45A6*	*U1L45D6*
3 – 3.9	*G1L4A6*	*G1L4D6*	*G2L4A6*	*G2L4D6*	*L1L4A6*	*L1L4D6*	*L2L4A6*	*L2L4D6*											
2 – 2.9	*G1L3A6*	*G1L3D6*	*G2L3A6*	*G2L3D6*	*L1L3A6*	*L1L3D6*	*L2L3A6*	*L2L3D6*											
1 – 1.9	*G1L2A6*	*G1L2D6*	*G2L2A6*	*G2L2D6*	*L1L2A6*	*L1L2D6*	*L2L2A6*	*L2L2D6*	1.5	*G3L15A6*	*G3L15D6*	*L3L15A6*	*L3L15D6*	*L4L15A6*	*L4L15D6*	*OGV15A6*	*OGV15D6*	*L15A6*	*U1L15D6*
>0 – 0.9	*G1L1A6*	*G1L1D6*	*G2L1A6*	*G2L1D6*	*L1L1A6*	*L1L1D6*	*L2L1A6*	*L2L1D6*											
TOTAL	*G1ALTOT6*	*G1DLTOT6*	*G2ALTOT6*	*G2DLTOT6*	*L1ALTOT6*	*L1DLTOT6*	*L2ALTOT6*	*L2DLTOT6*		*G3ALTOT6*	*G3DLTOT6*	*L3ALTOT6*	*L3DLTOT6*	*L4ALTOT6*	*L4DLTOT6*	*OGAVTOT6*	*OGDVTOT6*	*U1ALTOT6*	*U1DLTOT6*
Rating	*G1UWD6*		*G2UWD6*		*L1UWD6*		*L2UWD6*			*G3UWD6*		*L3UWD6*		*L4UWD6*		*OGUWD6*		*UCUWD6*	

TGC %	UNWEIGHTED DEP.	T.L. CARBON	T.L. FLAKED CARBON %
TGC6	*UWD6*	*TLC6*	*TLFC6*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 17

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

	TOP RING			**SECOND RING**			**OIL RING**		
	MASS (g)		MASS LOSS (mg)	MASS (g)		MASS LOSS (mg)	MASS (g)		MASS LOSS (mg)
CYLINDER	PRETEST	EOT		PRETEST	EOT		PRETEST	EOT	
1	*RWCYL1PT*	*RWCYL1ET*	*RWLCYL1T*	*RWCYL1PS*	*RWCYL1ES*	*RWLCYL1S*	*RWCYL1PO*	*RWCYL1EO*	*RWLCYL1O*
2	*RWCYL2PT*	*RWCYL2ET*	*RWLCYL2T*	*RWCYL2PS*	*RWCYL2ES*	*RWLCYL2S*	*RWCYL2PO*	*RWCYL2EO*	*RWLCYL2O*
3	*RWCYL3PT*	*RWCYL3ET*	*RWLCYL3T*	*RWCYL3PS*	*RWCYL3ES*	*RWLCYL3S*	*RWCYL3PO*	*RWCYL3EO*	*RWLCYL3O*
4	*RWCYL4PT*	*RWCYL4ET*	*RWLCYL4T*	*RWCYL4PS*	*RWCYL4ES*	*RWLCYL4S*	*RWCYL4PO*	*RWCYL4EO*	*RWLCYL4O*
5	*RWCYL5PT*	*RWCYL5ET*	*RWLCYL5T*	*RWCYL5PS*	*RWCYL5ES*	*RWLCYL5S*	*RWCYL5PO*	*RWCYL5EO*	*RWLCYL5O*
6	*RWCYL6PT*	*RWCYL6ET*	*RWLCYL6T*	*RWCYL6PS*	*RWCYL6ES*	*RWLCYL6S*	*RWCYL6PO*	*RWCYL6EO*	*RWLCYL6O*
AVERAGE MASS LOSS (mg)			*ARWLT*			*ARWLS*			*ARWLO*
STD. DEV. MASS LOSS (mg)			*SRWLT*			*SRWLS*			*SRWLO*
MAXIMUM MASS LOSS (mg)			*XRWLT*			*XRWLS*			*XRWLO*
MINIMUM MASS LOSS (mg)			*IRWLT*			*IRWLS*			*IRWLO*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 18
OIL ANALYSIS SUMMARY

Laboratory: *LAB*	EOT Date: *DTCOMP*	EOT Time: *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

Test Hours	VISCOSITY @ 100°C, cSt	TGA % SOOT	TBN D4739	TAN D664	COPPER (ppm)	IRON (ppm)	LEAD (ppm)	ALUMINUM (ppm)	CHROMIUM (ppm)
NEW	*V100NEW*	*TGANEW*	*TBNNEW*	*TANNEW*	*CUWMNEW*	*FEWMNEW*	*PBWNEW*	*ALWNEW*	*CRWNEW*
TST_H025	*V100H025*	*TGA_H025*			*CUWMH025*	*FEWMH025*	*PBWMH025*	*ALWMH025*	*CRWMH025*
TST_H050	*V100H050*	*TGA050*	*TBN_H050*	*TAN_H050*	*CUWMH050*	*FEWMH050*	*PBWMH050*	*ALWMH050*	*CRWMH050*
TST_H075	*V100H075*	*TGA_H075*			*CUWMH075*	*FEWMH075*	*PBWMH075*	*ALWMH075*	*CRWMH075*
TST_H100	*V100H100*	*TGA_H100*	*TBN_H100*	*TAN_H100*	*CUWMH100*	*FEWMH100*	*PBWMH100*	*ALWMH100*	*CRWMH100*
TST_H125	*V100H125*	*TGA_H125*	*TBN_H125*	*TAN_H125*	*CUWMH125*	*FEWMH125*	*PBWMH125*	*ALWMH125*	*CRWMH125*
TST_H150	*V100H150*	*TGA_H150*	*TBN_H150*	*TAN_H150*	*CUWMH150*	*FEWMH150*	*PBWMH150*	*ALWMH150*	*CRWMH150*
TST_H175	*V100H175*	*TGA_H175*	*TBN_H175*	*TAN_H175*	*CUWMH175*	*FEWMH175*	*PBWMH175*	*ALWMH175*	*CRWMH175*
TST_H200	*V100H200*	*TGA_H200*	*TBN_H200*	*TAN_H200*	*CUWMH200*	*FEWMH200*	*PBWMH200*	*ALWMH200*	*CRWMH200*
TST_H225	*V100H225*	*TGA_H225*	*TBN_H225*	*TAN_H225*	*CUWMH225*	*FEWMH225*	*PBWMH225*	*ALWMH225*	*CRWMH225*
TST_H250	*V100H250*	*TGA250*	*TBN_H250*	*TAN_H250*	*CUWMH250*	*FEWMH250*	*PBWMH250*	*ALWMH250*	*CRWMH250*
TST_H275	*V100H275*	*TGA_H275*	*TBN_H275*	*TAN_H275*	*CUWMH275*	*FEWMH275*	*PBWMH275*	*ALWMH275*	*CRWMH275*
TST_H300	*V100H300*	*TGA_H300*	*TBN_H300*	*TAN_H300*	*CUWMH300*	*FEWMH300*	*PBWMH300*	*ALWMH300*	*CRWMH300*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 19
TEST FUEL ANALYSIS (LAST BATCH)

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

FUEL SUPPLIER	**FUEL BATCH IDENTIFIER**
FUELSUP	*FUELBTID*

Measurement	**Specifications**	**Analysis**		**Test Method**
		NEW	**EOT**	
Total Sulfur, % Weight	0.04 – 0.05	*FUELSNEW*	*FUELSEOT*	D 2662
Gravity, ˚API	34.5 – 36.5	*APIGRNEW*	*APIGREOT*	D 1298
Hydrocarbon Composition				
Aromatics % Volume	28 – 33	*FUELAROM*		D 1319
Olefin	Report	*FUELOLEF*		D 1319
Cetane Index	Report	*CETANEIN*		D 4737
Cetane Number	42 – 48	*CETANENO*		D 613
Copper Strip Corrosion	1 Maximum	*FUELCU*		D 130
Flash Point, ˚C	54 Maximum	*FLASHPT*		D 93
Pour Point, ˚C	–18 Maximum	*FUELPOUR*		D 97
Carbon Residue on 10% Residuum, %	0.35 Maximum	*FUELCRES*		D 524 (10% Bottoms)
Water & Sediment, % Volume	0.05 Maximum	*FUELH2O*		D 2709
Viscosity, cSt @ 40 ˚C	2.4 – 3.0	*KINVIS*		D 445
Total Acid Number	0.05 Maximum	*FUELTAN*		D 664
Strong Acid Number	0.00 Maximum	*FUELSAN*		D 664
Accelerated Stability	tbd	*FUELACS*		D 2274
Saturates, %	Report	*FUELSATU*		D 1319
Cloud Point, ˚C	Report	*FUELCLOU*		D 2500
Distillation, ˚C				
IBP	Report	*FUELIBP*		D 86
10%	Report	*FUEL10*		D 86
50%	Report	*FUEL50*		D 86
90%	282 – 338	*FUEL90*		D 86
EP	Report	*FUELEP*		D 86

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 20
INJECTOR ADJUSTING SCREW MASS LOSS

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

SCREW #	PRE-TEST MASS, g	POST-TEST MASS, g	MASS LOSS, mg
1	*BOTIAS1*	*EOTIAS1*	*IASWL1*
2	*BOTIAS2*	*EOTIAS2*	*IASWL2*
3	*BOTIAS3*	*EOTIAS3*	*IASWL3*
4	*BOTIAS4*	*EOTIAS4*	*IASWL4*
5	*BOTIAS5*	*EOTIAS5*	*IASWL5*
6	*BOTIAS6*	*EOTIAS6*	*IASWL6*
		TOTAL	*IASWLTOT*
		AVERAGE	*AVGIAS*

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 21
UNSCHEDULED DOWNTIME & MAINTENANCE SUMMARY

Laborator *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OILCODE: *OILCODE*		

Number of Downtime		*DWNOCR*	
Test Hours	Date	Downtime	Reasons
DOWNR001	**DDATR001**	**DTIMR001**	**DREAR001**
		TOTLDOWN	Total Downtime (hours)

Other Comments		
Number of Comment Lines	*TOTCOM*	
OCOMR001		

M11 EGR LUBRICANT PERFORMANCE TEST
FORM 22
CHARACTERISTICS OF THE DATA ACQUISITION SYSTEM

Laboratory *LAB*	EOT Date *DTCOMP*	EOT Time *EOTTIME*
TEST NUMBER		
STAND: *STAND*	ENGINE: *ENGINE*	ENGINE RUN NO.: *ENRUN*
FORMULATION/STAND CODE: *FORM*		
OIL CODE: *OILCODE*		

PARAMETER (1)	SENSING DEVICE (2)	CALIBRATION FREQUENCY (3)	RECORD DEVICE (4)	OBSERVATION FREQUENCY (5)	RECORD FREQUENCY (6)	LOG FREQUENCY (7)	SYSTEM RESPONSE (8)
Temperature							
Oil	*OTEMSENS*	*OTEMCALF*	*OTEMRECD*	*OTEMOBSF*	*OTEMRECF*	*OTEMLOGF*	*OTEMSYSR*
Fuel In	*FTEMSENS*	*FTEMCALF*	*FTEMRECD*	*FTEMOBSF*	*FTEMRECF*	*FTEMLOGF*	*FTEMSYSR*
Intake	*AITSENS*	*AITCALF*	*AITRECD*	*AITOBSF*	*AITRECF*	*AITLOGF*	*AITSYSR*
Intake	*IMANSENS*	*IMANCALF*	*IMANRECD*	*IMANOBSF*	*IMANRECF*	*IMANLOGF*	*IMANSYSR*
Pre-Turb.	*PTURSENS*	*PTURCALF*	*PTURRECD*	*PTUROBSF*	*PTURRECF*	*PTURLOGF*	*PTURSYSR*
Cool. Out	*COTSENS*	*COTCALF*	*COTRECD*	*COTOBSF*	*COTRECF*	*COTLOGF*	*COTSYSR*
Pressure							
Inlet Air	*INRESENS*	*INRECALF*	*INRERECD*	*INREOBSF*	*INRERECF*	*INRELOGF*	*INRESYSR*
Exhaust	*EXPRSENS*	*EXPRCALF*	*EXPRRECD*	*EXPROBSF*	*EXPRRECF*	*EXPRLOGF*	*EXPRSYSR*
Oil	*OILGSENS*	*OILGCALF*	*OILGRECD*	*OILGOBSF*	*OILGRECF*	*OILGLOGF*	*OILGSYSR*
Other							
Fuel Flow	*FFLOSENS*	*FFLOCALF*	*FFLORECD*	*FFLOOBSF*	*FFLORECF*	*FFLOLOGF*	*FFLOSYSR*
Speed	*RPMSENS*	*RPMCALF*	*RPMRECD*	*RPMOBSF*	*RPMRECF*	*RPMLOGF*	*RPMSYSR*
Load	*LOADSENS*	*LOADCALF*	*LOADRECD*	*LOADOBSF*	*LOADRECF*	*LOADLOGF*	*LOADSYSR*

LEGEND:
(1) OPERATING PARAMETER
(2) THE TYPE OF DEVICE USED TO MEASURE TEMPERATURE, PRESSURE OR FLOW
(3) FREQUENCY AT WHICH THE MEASUREMENT SYSTEM IS CALIBRATED
(4) THE TYPE OF DEVICE
DL – AUTOMATIC DATA LOGGER
C/D – COMPUTER, USING DIRECT I/O ENTRY
(5) DATA ARE OBSERVED BUT ONLY IF RECORDED OFF SPEC.
(6) DATA ARE RECORDED BUT ARE NOT RETAINED AT EOT
(7) DATA ARE LOGGED AS PERMANENT RECORD, NOTE SPECIFY IF:
SS – SNAPSHOT TAKEN AT SPECIFIED FREQUENCY
AG/X AVERAGE OF X DATA POINTS AT SPECIFIED FREQUENCY
(8) TIME IN SECONDS FOR THE OUTPUT TO REACH 63.2% OF FINAL VALUE FOR STEP CHANGE AT INPUT

M11 EGR LUBRICANT PERFORMANCE TEST
Liner Wear Summary
Form 23

Laborato*LAB*	EOT *DTCOMP*	EOT Time*EOTTIME*
Stand: *STAND*	Engine: *ENGINE*	Engine Run *ENRUN*
Oil *OILCODE*		
Formulation/Stand *FORM*		

	WEAR STEP (µm)					
	Cylinder Number					
POSITION	1	2	3	4	5	6
1:00	*C1LW1*	*C2LW1*	*C3LW1*	*C4LW1*	*C5LW1*	*C6LW1*
2:00	*C1LW2*	*C2LW2*	*C3LW2*	*C4LW2*	*C5LW2*	*C6LW2*
3:00 (Thrust)	*C1LW3*	*C2LW3*	*C3LW3*	*C4LW3*	*C5LW3*	*C6LW3*
4:00	*C1LW4*	*C2LW4*	*C3LW4*	*C4LW4*	*C5LW4*	*C6LW4*
5:00	*C1LW5*	*C2LW5*	*C3LW5*	*C4LW5*	*C5LW5*	*C6LW5*
6:00 (Rear)	*C1LW6*	*C2LW6*	*C3LW6*	*C4LW6*	*C5LW6*	*C6LW6*
7:00	*C1LW7*	*C2LW7*	*C3LW7*	*C4LW7*	*C5LW7*	*C6LW7*
8:00	*C1LW8*	*C2LW8*	*C3LW8*	*C4LW8*	*C5LW8*	*C6LW8*
9:00	*C1LW9*	*C2LW9*	*C3LW9*	*C4LW9*	*C5LW9*	*C6LW9*
10:00	*C1LW10*	*C2LW10*	*C3LW10*	*C4LW10*	*C5LW10*	*C6LW10*
11:00	*C1LW11*	*C2LW11*	*C3LW11*	*C4LW11*	*C5LW11*	*C6LW11*
12:00 (Front)	*C1LW12*	*C2LW12*	*C3LW12*	*C4LW12*	*C5LW12*	*C6LW12*
Average	*C1ALW*	*C2ALW*	*C3ALW*	*C4ALW*	*C5ALW*	*C6ALW*

Summary	**As Measured**	**Outlier**	**Adjusted to X.XX%**
Average, µm	*AMACLW*	*ACLW*	*ALW*
Std. Dev., µm	*AMSCLW*	*SCLW*	
Minimum, µm	*AMICLW*	*ICLW*	
Maximum, µm	*AMXCLW*	*XCLW*	
Ring Flaked Liners	*FLKLIN*		
Outlier Liners	*OUTLIN*		